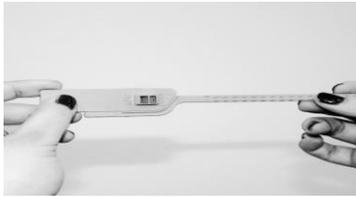


## FORT DOUBLE TWIN LOCK LOCKING PROCEDURE



**Diagram A**

**D**

**Diagram B**



**Diagram C**



**Diagram D**

### **STEP 1**

Make sure the seal flap is held with the rear side facing the user, as shown in Diagram A.

### **STEP 2**

Hold the seal flap using one hand and with the other, insert the strip into the “ENTER 1” hole, as shown in Diagram B. Pull strip as per required (Preferably pull tight).

### **STEP 3**

Insert the strip to “ENTER 2” through the other side as shown in Diagram C. After inserting, pull the strip tight until the maximum and ensure there is no gap left after sealing.

### **STEP 4**

To tear off or remove the seal, hold the seal flap using one hand and with the other, pull at the tear-off section of the seal as shown in Diagram D.



### **STEP 1**

Make sure the seal flap is held with the rear side facing the user, as shown in Diagram A.

### **STEP 2**

Hold the seal flap using one hand and with the other, insert the strip into the “ENTER 1” hole, as shown in Diagram B. Pull strip as per required (Preferably pull tight).

### **STEP 3**

Insert the strip to “ENTER 2” through the other side as shown in Diagram C. After inserting, pull the strip tight until the maximum and ensure there is no gap left after sealing.

### **STEP 4**

To tear off or remove the seal, hold the seal flap using one hand and with the other, pull at the tear-off section of the seal as shown in Diagram D.

